

Cablevey Conveyors – The Gentle Way to Convey

Tubular drag conveyors – changing the nature of tea and coffee processing

Tubular drag conveyors, like the Cablevey system, are changing the nature of tea and coffee processing.

It is important to keep the integrity of the product while conveying the tea/coffee and to protect it from contamination. The highly efficient Cablevey system drags the product internally and safely to its next destination while its urethane clean-out discs eliminate any residual flavours.

The Cablevey system offers various points for inspection, discharge points, spots to view the tea or coffee passing through and often a turn-around unit can be opened. Production flow can be adjusted with various available speeds. Systems can be made to fit any of the processing stages, although tea producers that use tubular drag conveyors do so after the last drying stage, when the tea is in its most fragile form.

Cablevey systems are designed specifically for the individual client and offer many options in layout, length and size. Any design configuration that is required can be accommodated.



GROUND COFFEE

GREEN COFFEE


COCOA POWDER

ROASTED COFFEE

ROASTED COCOA NIBS

BLACK TEA

GREEN TEA

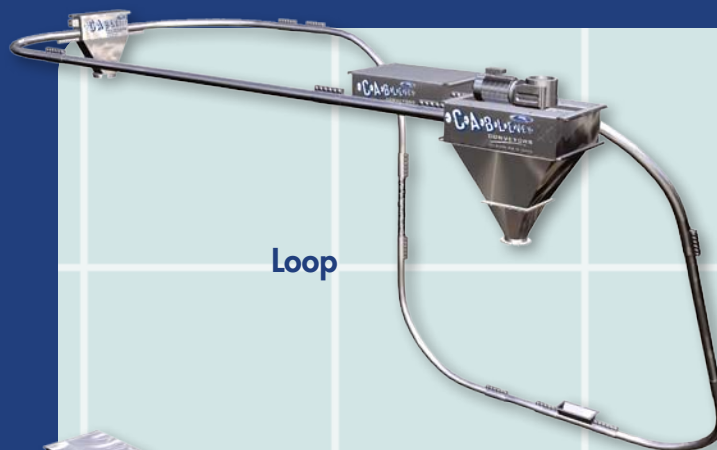

Loop



Horizontal



U- Horseshoe



Transfer

Portable

- Gentle Handling – Less Breakage
- Energy-efficient
- Low Decibels – Quiet!
- Minimal Footprint
- Dust-Free Enclosed System – No Filters

Key features of the Cablevey system

- **Cable & discs** – this method allows for great flexibility in conveyance of a wide variety of material
- **Various inlet types** – to fit YOUR application
- **Inspection tube** – transparent view
- **Directional change** – sweep
- **Single discharge** – rotate 180° to preserve quality
- **Multiple discharge** – select where material goes
- **Drive unit** – compact and low HP
- **Tension turnaround unit** – self adjusting

SUPER 2


Two-Inch Diameter (50mm) System
Up to 75 ft³ (2.12m³)/hour

SUPER 4

Four-Inch Diameter (100mm) System
Up to 525 ft³ (14.87m³)/hour

SUPER 6

Six-Inch Diameter (150mm) System
Up to 1,250 ft³ (35.4m³)/hour

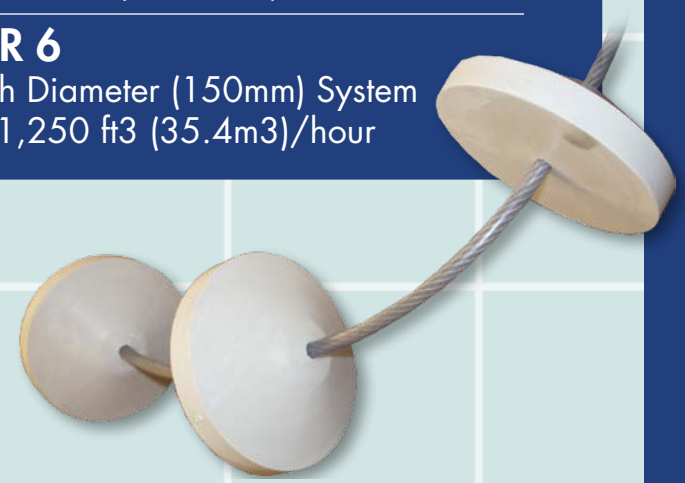

For more information please contact Flo-Mech Limited



Flo-Mech Limited Flo-Mech House | Paxton Road | Orton Goldhay | Peterborough PE2 5YA | United Kingdom
Tel +44 (0)1733 233166 Fax +44 (0)1733 235200 www.flo-mech.com email enquiries@flo-mech.com